

10-25-00

A

PATENT APPLICATION TRANSMITTAL LETTER

Atty's Docket No.: 34828.006

TO: ASSISTANT COMMISSIONER FOR PATENTS

Enclosed is the patent application of Alan C. Atwood for CUTTING TABLE AND CLAMP FOR USE THEREWITH.

Enclosed are:

- ☒ Nineteen (19) pages of text
- ☒ Three (3) sheets of drawings
- ☒ declaration and associated power of attorney (signed)

CLAIMS AS FILED

For	No. Filed	No. Extra
Basic Fee		
Total Claims	22 - 20 =	2
Indep Claims	4 - 3 =	1
Multiple Dependent Claim Present		


SMALL ENTITY

Rate	Fee
	\$355
x \$9 =	\$18
x \$40 =	\$39
+ \$135 =	\$
Total	\$412

OTHER THAN A
SMALL ENTITY

Rate	Fee
	\$ 690
x \$18 =	\$
x \$80 =	\$
+ \$270 =	\$
Total	\$

- ☒ A check for \$412 to cover the filing fee is enclosed.
- ☒ The Commissioner is hereby authorized to charge payment of the following fees associated with this communication or credit any overpayment to Deposit Account No. 18-2055.
 - ☒ Any additional filing fees required under 37 CFR 1.16.
 - ☒ Any patent application processing fees under 37 CFR 1.17.


Charles S. Sara, Reg. No. 30,492
DEWITT ROSS & STEVENS, S.C.
Firststar Financial Centre
8000 Excelsior Drive, Suite 401
Madison, Wisconsin 53717-1914
Telephone: (608) 831-2100
Facsimile: (608) 831-2106

I hereby certify that this correspondence is being deposited with the U.S. Postal Service as Express Mail - Post Office to Addressee, in an envelope addressed to:

Box: Patent Application
Assistant Commissioner for Patents
Washington, D.C. 20231.

Express Mail Label No.: EL674300539US

Date of Deposit: 10-19-00

Signature: Marcia Layton

CUTTING TABLE AND CLAMP FOR USE THEREWITH

ALAN C. ATWOOD

CROSS-REFERENCE TO RELATED APPLICATIONS

5 This application claims priority under 35 USC §119(e) to U.S. provisional patent application serial no. 60/160,273, filed October 19, 1999, the entirety of which is incorporated by reference herein.

FIELD OF THE INVENTION

10 The invention is generally directed to clamps for holding items, and more particularly to clamps for retaining items to be cut.

BACKGROUND OF THE INVENTION

15 Window blinds, referred to as Venetian blinds or mini-blinds, are well-known window treatments. Generally, window blinds include a top header, slats or louvers, and a bottom header (also known as a footer). These pieces are usually held together with cords, strings, or the like. Manufacturers and retailers sell window blinds in various standardized sizes, with custom sizes available. However, custom-sized window blinds are costly. Furthermore, time is required to measure the window and to make the custom-sized blind, and then to deliver it to the consumer. To be cost-efficient, it is desirable to have the cutting process take less than four minutes.

20 Efforts at providing a faster and cost-effective way to generate custom-sized blinds have been made. In general, these devices first cut one side of a blind and then the other side, such that the end cords are

symmetrically disposed with equal lengths of blind on either side of each end cord.

Some of the conventional cutting machines employ air cylinders for driving the cutters. The air cylinders automate the cutting of the blinds, thereby requiring less manual input from the user.

In conventional blind cutters, blinds are held in place in numerous ways. For example, some cutters have openings that fit the header, footer, and slats of the blind. Others use a clamp for fixing the blinds in position.

Examples of U.S. patents for machines that cut blinds include U.S. Patent No. 5,799,557 to *Wang*, U.S. Patent No. 5,816,126 to *Pluber*, 5,927,172 to *Wang*, and U.S. Patent No. 5,806,394 to *Marocco*.

The conventional cutters are used in stores that sell blinds to consumers. Relatively unskilled workers perform the cutting. However, the workers using these cutters must be strong enough to lift and rotate the blind after a cut is made on the first side of the blind. Blinds can weigh up to thirty pounds. This heavy weight makes rotating the blinds a difficult task for many workers.

Furthermore, holeless blinds, such as the one described in U.S. Patent No. 5,769,140 to *Tuzmen*, which lack cords that hold each slat in place, have recently been introduced into the market. Many of these holeless blinds have slats or blades that are free to move. This further complicates the rotating process that must be performed between cutting the two ends, because slats can slip out of the blind. Thus, rotation of blinds is difficult for many workers, with the accidental disassembly of blinds sometimes occurring. Reassembling a disassembled blind is difficult, if not impossible.

Moreover, a rotating clamp is useful for clamping and cutting additional items, such as louver packs (i.e., packages of blind slats), and materials made of wood, plastic, and the like.

SUMMARY OF THE INVENTION

The invention, which is defined by the claims set out at the end of this disclosure, is intended to solve at least some of the problems noted above. A clamp is provided that includes an upper jaw, a lower jaw, and a backplate. The lower jaw and the upper jaw are pivotally connected to the backplate. Also included in the clamp is a latch that restrains the lower and upper jaws against movement relative to one another. The clamp is capable of retaining an item to be cut, translating on the table, and rotating on an axis parallel to the plane of the table.

An apparatus for cutting an item to be cut is also provided. The apparatus includes a table and a clamp for retaining the item. The clamp is capable of translating on the table and rotating on an axis parallel to the plane of the table between cutting a first end of the item and cutting a second end of the item.

Also provided is a clamp that retains and rotates a window blind between cutting a first end of the window blind and cutting a second end of the window blind. The clamp is capable of translating on the table and rotating on an axis parallel to the plane of the table. The clamp includes an upper jaw, a lower jaw, and a backplate that pivotally connects the lower jaw and the upper jaw. The clamp includes a latch that restrains the lower and upper jaws against movement relative to one another. The clamp is capable of retaining a window blind, translating on the table, and rotating on an axis parallel to the plane of the table.

The invention also provides an apparatus for cutting a window blind. The apparatus includes a table and a clamp for retaining the window blind. The cutting table can also include a cutter for cutting a window blind. The cutter is disposed on the table. The apparatus has optional pull-out shelves for stabilizing the cut blinds while they are repackaged.

Further advantages, features, and objects of the invention will be apparent from the following detailed description of the invention in conjunction with the associated drawings.

BRIEF DESCRIPTION OF THE DRAWINGS

FIG. 1 is a perspective view of a preferred embodiment of the rotating clamp **40** with the rotating clamp **40** having a blind **20** inserted therein in a cutting position.

FIG. 2 is a perspective view of the rotating clamp **40** showing the details of the rotating clamp **40**, mount **44**, shaft **46**, track **74**, and tray **76**.

FIG. 3 is a perspective view of the preferred embodiment of the rotating clamp **40** with the rotating clamp **40** holding a blind **20** while the blind **20** is being rotated.

DETAILED DESCRIPTION OF THE INVENTION

In the drawings, a preferred embodiment of an apparatus for cutting an item is illustrated in **FIG. 1** at the reference numeral **10**. The apparatus **10** is particularly useful in cutting window blinds **20**, which typically include a header **22** that is attached to a frame of a window, a plurality of slats **24** that are typically strung together and attached to the header **22**, and a footer **26** below the last slat **24**.

The apparatus 10 has an upper surface 12 on which the clamping, aligning, and cutting takes place. The upper surface 12 of the apparatus 10 includes a cutter 30 on one end of the apparatus 10, a rotating clamp 40 in the middle of the apparatus 10, and an alignment assembly 32, which is preferably near the end opposite the cutter 30.

As can be best seen in FIG. 2, the preferred embodiment of the rotating clamp 40 includes an upper jaw 50 and a lower jaw 60. The upper jaw 50 has two arms 54 that are fixedly attached by fasteners 59 to a front plate 58. The lower jaw 60 includes two arms 64 that are fixedly attached through fasteners 69 to a front plate 68. Arms 54 of upper jaw 50 and arms 64 of lower jaw 60 are connected to backplate 56 at pivots 51 and 61, respectively.

The preferred embodiment for the rotating clamp 40 employs two latches 70, 71. The latches 70, 71 are located on the front plate 58 of the upper jaw 50, and the front plate 68 of the lower jaw 60. The two latches 70, 71 retain and stabilize the blind 20 in the rotating clamp 40 by restraining the lower jaw 60 and upper jaw 50 against movement relative to one another.

Referring to FIG. 1, the rotating clamp 40 opens to receive a blind 20 to be cut. To open the rotating clamp 40, the latches 70, 71 are disengaged, and the upper jaw 50 is upwardly rotated away from the lower jaw 60. A blind 20 is placed in the rotating clamp 40. The rotating clamp 40 then is closed over the blind 20 by downwardly rotating upper jaw 50 toward lower jaw 60. Then, the rotating clamp 40 is secured by engaging latches 70, 71 thereby retaining the blind 20 in place. As detailed below, the rotating clamp 40 allows the blind 20 clamped therein to be rotated, preferably after the first side of the blind 20 has been cut.

Referring to **FIGS. 1** and **3**, the apparatus **10** optionally includes alignment pins **34** on both sides of the rotating clamp **40**. The alignment pins **34** are rotatably attached to the upper surface **12** of the apparatus **10** by hinges or the like (not shown) so that they may fold from a position parallel to the upper surface **12** of the apparatus **10** to a position perpendicular to the upper surface **12**. The alignment pins **34** can be inserted into channels **36** of the upper surface **12** of the apparatus **10**. When in an upright position, the alignment pins **34** provide a stop and further assist in the alignment of an item to be cut. When folded into channels **36**, the alignment pins **34** are level with or below the surface **12** of the apparatus **10**. As such, the alignment pins **34** do not interfere with the movement along the apparatus **10** of the item to be cut.

To further aid in aligning the blind **20**, the apparatus **10** also includes alignment assembly **32**, which includes header insert **38**. After the blind **20** is placed in clamp **40**, but before the upper jaw **50** is rotated toward the lower jaw **60**, the alignment assembly **32** is moved toward the side of the blind **20** that is away from the cutter **30**. The header **22** of the blind **20** can be inserted into the header insert **32**. By holding the alignment assembly **32** against the side of the blind **20**, the blind is aligned with the apparatus **10** and movement of the blind **20** is reduced or eliminated. Another benefit of the alignment assembly **32** is that when the alignment assembly **32** is pushed against the blind **20** (or vice versa) to align the edge of the blind **20**, the blind **20** is cut is straight. Once the blind **20** is aligned, the upper jaw **50** is rotated downwardly toward the lower jaw **60**, and secured by latches **70**, **71**. Once the blind **20** is secured in the clamp **40**, the alignment assembly **32** can be translated away from the blind **20**.

Referring back to **FIG. 2**, the apparatus **10** also includes a mount **44** that has a shaft **46** that is fixed to the rotating clamp **40** at the backplate **56** at opening **48**. The mount **44** slides along a track **74**, which is attached to tray **76** of the apparatus **10**. The track **74** permits the rotating clamp **40** to be translated on the upper surface **12** of the apparatus **10**. Front plate **58** of upper jaw **50** and front plate **68** of lower jaw **60** have recesses **52**, **62**, respectively, that permit sliding of the clamp **40** over track **74**. Preferably, shaft **46** is fixed to the mount **44**, and the mount **44** slides over the track **74**. Once the blind **20** is translated beyond the edge of the apparatus **10**, a plunger **72** on the mount **44** is disengaged from the shaft **46** to permit rotation of the blind **20**. Preferably, the plunger **72** is spring loaded, although it need not be. The plunger **72** is used in conjunction with a shaft **46** having two holes (not shown) on opposites of the shaft **46**. The two holes are located such that when the plunger **72** is inserted into them, the clamp **40** stops at a position that is parallel to the apparatus **10**. Thus, when the plunger **72** is disengaged from the holes, the shaft **46** rotates freely. When the plunger **72** is inserted into one of the holes, the blind **20** is held in a fixed rotational orientation. The spring-loaded plunger **72** pushes the plunger **72** into the holes. This combination of the plunger **72** and the holes provides a way to lock the shaft **46** and clamp **40** in place after the clamp **40** is rotated 180°.

A preferred cutter **30** is described in U.S. Patent 5,806,394. The cutter **30** is preferably at the opposite end of the apparatus **10** from the alignment assembly **32**. Cutting can be performed by methods known to the art, such as those described in the above-mentioned patents, which are incorporated herein by reference for their description of cutting methods and devices. For example, cutting can be done with a single blade that slides

and cuts the entire blind 20. Alternatively, multiple blade assemblies can be used, such as one with a separate blade for each of the top header 22, slats 24, and footer 26. Cutting can be manual, such as by a hand crank, or powered, such as by a cylinder stroke.

5 With the blind 20 placed in the cutter 30, the first side of the blind 20 is cut. FIGS. 1 and 3 show a blind 20 that is shortened such that the apparatus 10 can be seen. After the first side of the blind 20 is cut, the blind 20 is then rotated by disengaging the plunger 72 of the mount 44, which permits the rotating clamp 40 containing the blind 20 to be translated toward the edge of the apparatus 10. The translation is achieved by sliding the mount 32 along the track 70 of the upper surface 12 of the apparatus 10 or by other modes of translation previously noted.

10 Next, the rotating clamp 40 and the blind 20 secured therein are extended beyond the edge of upper surface 12 of the apparatus 10 as illustrated in FIG. 3. Then, the blind 20 is rotated about 180° such that the uncut end of the blind 20 now is on the side of the apparatus 10 that includes the cutter 30. The rotation of the clamp 40 is shown in FIG. 3 with arrows indicating the movement of the rotating clamp 40. After the blind 20 is rotated, the other side of the blind 20 is then cut. In general, equal lengths are cut from each side of the blind 20. After both sides of the blind 20 have been cut, the latches 70, 71 are disengaged, thereby releasing the blind 20.

15 As is illustrated in FIGS. 1 and 3, the apparatus 10 optionally includes recesses 78 through which optional shelves 80 can be accessed. The shelves 80 are pulled out from the apparatus 10 and remain fixed to the apparatus 10. Before the latches 70, 71 are released, the blind 20 is translated beyond the apparatus 10. After the latches 70, 71 are released,

and the blind 20 is moved onto the shelves 80, which hold the blind 20 while the blind 20 is repackaged.

The rotating clamp 40 can be used with any apparatus 10, including, but not limited to, those described in the patents listed above. For example, the rotating clamp 40 can be used with a home workbench.

In addition, the rotating clamp 40 can be used to clamp and cut a variety of items such as louver packs (i.e., packages of blind slats), and materials made of wood, plastic, and the like. For example, the rotating clamp 40 can be used to clamp and cut PVC pipe, gutters, and lumber.

It is understood that while description of the rotating clamp 40 refers to an upper jaw 50 and a lower jaw 60, once rotated, the upper jaws will then be below the lower jaw 60, and vice versa. It is also understood that the rotating described above could take place in other orientations and directions. For example, the shaft 46, mount 44, and clamp 40 could be in a horizontal plane (as described above) or in a vertical plane. Likewise, the cutting, rotating, and other operations could take place in other orientations and directions. For example, the cutting can take place in the horizontal plane or the vertical plane. The cutting can be accomplished by the downward movement of a cutting blade toward the blind 20 or by the horizontal translation of a cutting blade toward the blind 20.

It is also understood that the various preferred embodiments are shown and described above to illustrate different possible features of the invention and the varying ways in which these features may be combined. Apart from combining the different features of the above embodiments in varying ways, other modifications are also considered to be within the scope of the invention. Certain preferred options follow.

First, the upper jaw 50 and lower jaw 60 can be of unitary construction. For example, instead the upper jaw 50 consisting of a front plate 52 and two arms 54, the upper jaw 50 could consist of one U-shaped piece.

Second, the upper jaw 50 and the lower jaw 60 can be directly connected to each other, as opposed to having both the upper jaw 50 and the lower jaw 60 connected to the backplate 56.

Third, the latch 70 can be a single latch, multiple latches, or any similar latching device. If multiple latches 70, 71 are employed, one can be located on the upper jaw 50 and the other on the lower jaw 60. Alternatively, the latches 70, 71 can both be on the same jaw.

Fourth, as noted above, the clamp 40 described herein can also cut louver packs, which are packages of blind slats 24. The packs may be aligned with alignment assembly 32. Pins 34 and channels 36 are particularly useful for aligning louver packs.

Fifth, other methods can be used to translate the rotating clamp 40. For example, the shaft 46 can be a telescoping shaft that telescopically elongates to permit the translation of the rotating clamp 40 on the upper surface 12 of the apparatus 10.

Sixth, the plunger 72 can be replaced with a different mechanism for locking the shaft 46 and clamp 40 in place after the clamp 40 is rotated 180°. For example, a male and female connector can be used, with one located on the mount 44 (or a fastener connected to the mount 44) and the other located on the shaft 46. Other examples include, but are not limited to, a threaded fastener that pushes against the shaft 46 to prevent rotational movement, a latch, and a bolt.

The invention is not intended to be limited to the preferred embodiments described above, but rather is intended to be limited only by the claims set out below. Thus, the invention encompasses all alternate embodiments that fall literally or equivalently within the scope of these claims.

What is claimed is:

1. An apparatus for cutting an item to be cut comprising:
 - (a) a table; and
 - (b) a clamp for retaining the item, the clamp being capable of translating on the table and rotating on an axis parallel to the plane of the table between cutting a first end of the item and cutting a second end of the item.
- 5
2. The apparatus of claim 1, wherein the clamp comprises:
 - (a) an upper jaw;
 - (b) a backplate;
 - (c) a lower jaw, the lower jaw and the upper jaw pivotally connected to the backplate; and
 - (d) a latch that restrains the lower and upper jaws against movement relative to one another.
- 5
3. The apparatus of claim 1, further comprising a cutter that is disposed on the table.
4. The apparatus of claim 1, wherein the clamp restrains the item during cutting, and the clamp rotates the item between cutting a first end of the item and cutting a second end of the item.

5. The apparatus of claim 1, further comprising:

- (a) a mount;
- (b) a shaft that is affixed on one end to the mount and on the other end to the clamp;
- 5 (c) a tray that is affixed to the table;
- (d) a track that is disposed in the tray, the track guiding the mount while the clamp translates on the table in a plane that is parallel to the table; and
- 10 (e) a plunger that fixes the mount to the shaft when a desired rotational position is reached.

6. The apparatus of claim 5, further comprising a cutter that is disposed on the table; wherein the clamp comprises:

- (a) an upper jaw;
- (b) a backplate;
- 5 (c) a lower jaw, the lower jaw and the upper jaw pivotally connected to the backplate; and
- (d) a latch that restrains the lower and upper jaws against movement relative to one another.

7. An apparatus for cutting a window blind comprising:

- (a) a table; and
- 5 (b) a clamp for retaining the window blind, the clamp being capable of translating on the table and rotating on an axis parallel to the plane of the table between cutting a first end of the window blind and cutting a second end of the window blind.

8. The apparatus of claim 7, wherein the clamp comprises
- (a) an upper jaw;
 - (b) a backplate;
 - (c) a lower jaw, the lower jaw and the upper jaw pivotally
5 connected to the backplate; and
 - (d) a latch that restrains the lower and upper jaws against
movement relative to one another.
9. The apparatus of claim 7, further comprising a cutter that is disposed
on the table.
10. The apparatus of claim 7, wherein the clamp restrains a window
blind during cutting, and the clamp rotates the window blind between
cutting a first end of the window blind and cutting a second end of
the window blind.
11. The apparatus of claim 7, further comprising:
- (a) a mount;
 - (b) a shaft that is affixed on one end to the mount and on the
other end to the clamp;
 - (c) a tray that is affixed to the table;
 - (d) a track that is disposed in the tray, the track guiding the
5 mount while the clamp translates on the table in a plane that
is parallel to the table; and
 - (e) a plunger that fixes the mount to the shaft when a desired
10 rotational position is reached.

12. The apparatus of claim 11, further comprising a cutter that is disposed on the table; wherein the clamp comprises:

- (a) an upper jaw;
- (b) a backplate;
- (c) a lower jaw, the lower jaw and the upper jaw pivotally connected to the backplate; and
- (d) a latch that restrains the lower and upper jaws against movement relative to one another.

13. A clamp comprising:

- (a) an upper jaw;
- (b) a lower jaw;
- (c) a backplate, the lower jaw and the upper jaw pivotally connected to the backplate; and
- (d) a latch that restrains the lower and upper jaws against movement relative to one another; wherein the clamp is capable of retaining an item to be cut, translating on the table, and rotating on an axis parallel to the plane of the table.

14. The clamp of claim 13, in combination with a table, the clamp being affixed to the table.

15. The clamp of claim 13, wherein the clamp is capable of restraining the item during cutting, and the clamp permits rotation of the item after a first end of the window blind is cut.

16. The clamp of claim 13, in combination with

- (a) a mount;
- (b) a shaft that is affixed on one end to the mount and on the other end to the clamp;
- 5 (c) a tray that is affixed to the table;
- (d) a track that is disposed in the tray, the track guiding the mount while the clamp translates on the table in a plane that is parallel to the table; and
- 10 (e) a plunger that fixes the mount to the shaft when a desired rotational position is reached.

17. The clamp of claim 16, further comprising a cutter that is disposed on the table; wherein the clamp comprises:

- (a) an upper jaw;
- (b) a backplate;
- 5 (c) a lower jaw, the lower jaw and the upper jaw pivotally connected to the backplate; and
- (d) a latch that restrains the lower and upper jaws against movement relative to one another.

5

18. A clamp comprising:
- (a) an upper jaw;
 - (b) a lower jaw;
 - (c) a backplate, the lower jaw and the upper jaw pivotally connected to the backplate; and
 - (d) a latch that restrains the lower and upper jaws against movement relative to one another; wherein the clamp is capable of retaining a window blind, translating on the table, and rotating on an axis parallel to the plane of the table.
19. The clamp of claim 18, in combination with a table, the clamp being affixed to the table.
20. The clamp of claim 18, wherein the clamp is capable of restraining the window blind during cutting, and the clamp permits rotation of the window blind after a first end of the window blind is cut.

21. The clamp of claim 18, in combination with

- (a) a mount;
- (b) a shaft that is affixed on one end to the mount and on the other end to the clamp;
- 5 (c) a tray that is affixed to the table;
- (d) a track that is disposed in the tray, the track guiding the mount while the clamp translates on the table in a plane that is parallel to the table; and
- 10 (e) a plunger that fixes the mount to the shaft when a desired rotational position is reached.

22. The clamp of claim 21, further comprising a cutter that is disposed on the table; wherein the clamp comprises:

- (a) an upper jaw;
- (b) a backplate;
- 5 (c) a lower jaw, the lower jaw and the upper jaw pivotally connected to the backplate; and
- (d) a latch that restrains the lower and upper jaws against movement relative to one another.

CUTTING TABLE AND CLAMP FOR USE THEREWITH

ABSTRACT

A clamp is provided that is capable of restraining an item during cutting and rotating the item between cutting a first end of the item and cutting a second end of the item. The clamp includes an upper jaw, a lower jaw, and a backplate that pivotally connects the lower jaw and the upper jaw. The clamp includes a latch that restrains the lower and upper jaws against movement relative to one another. Also provided is an apparatus for cutting an item. The apparatus includes a table and the clamp described above. Optionally, the apparatus can also include a cutter for cutting the item.

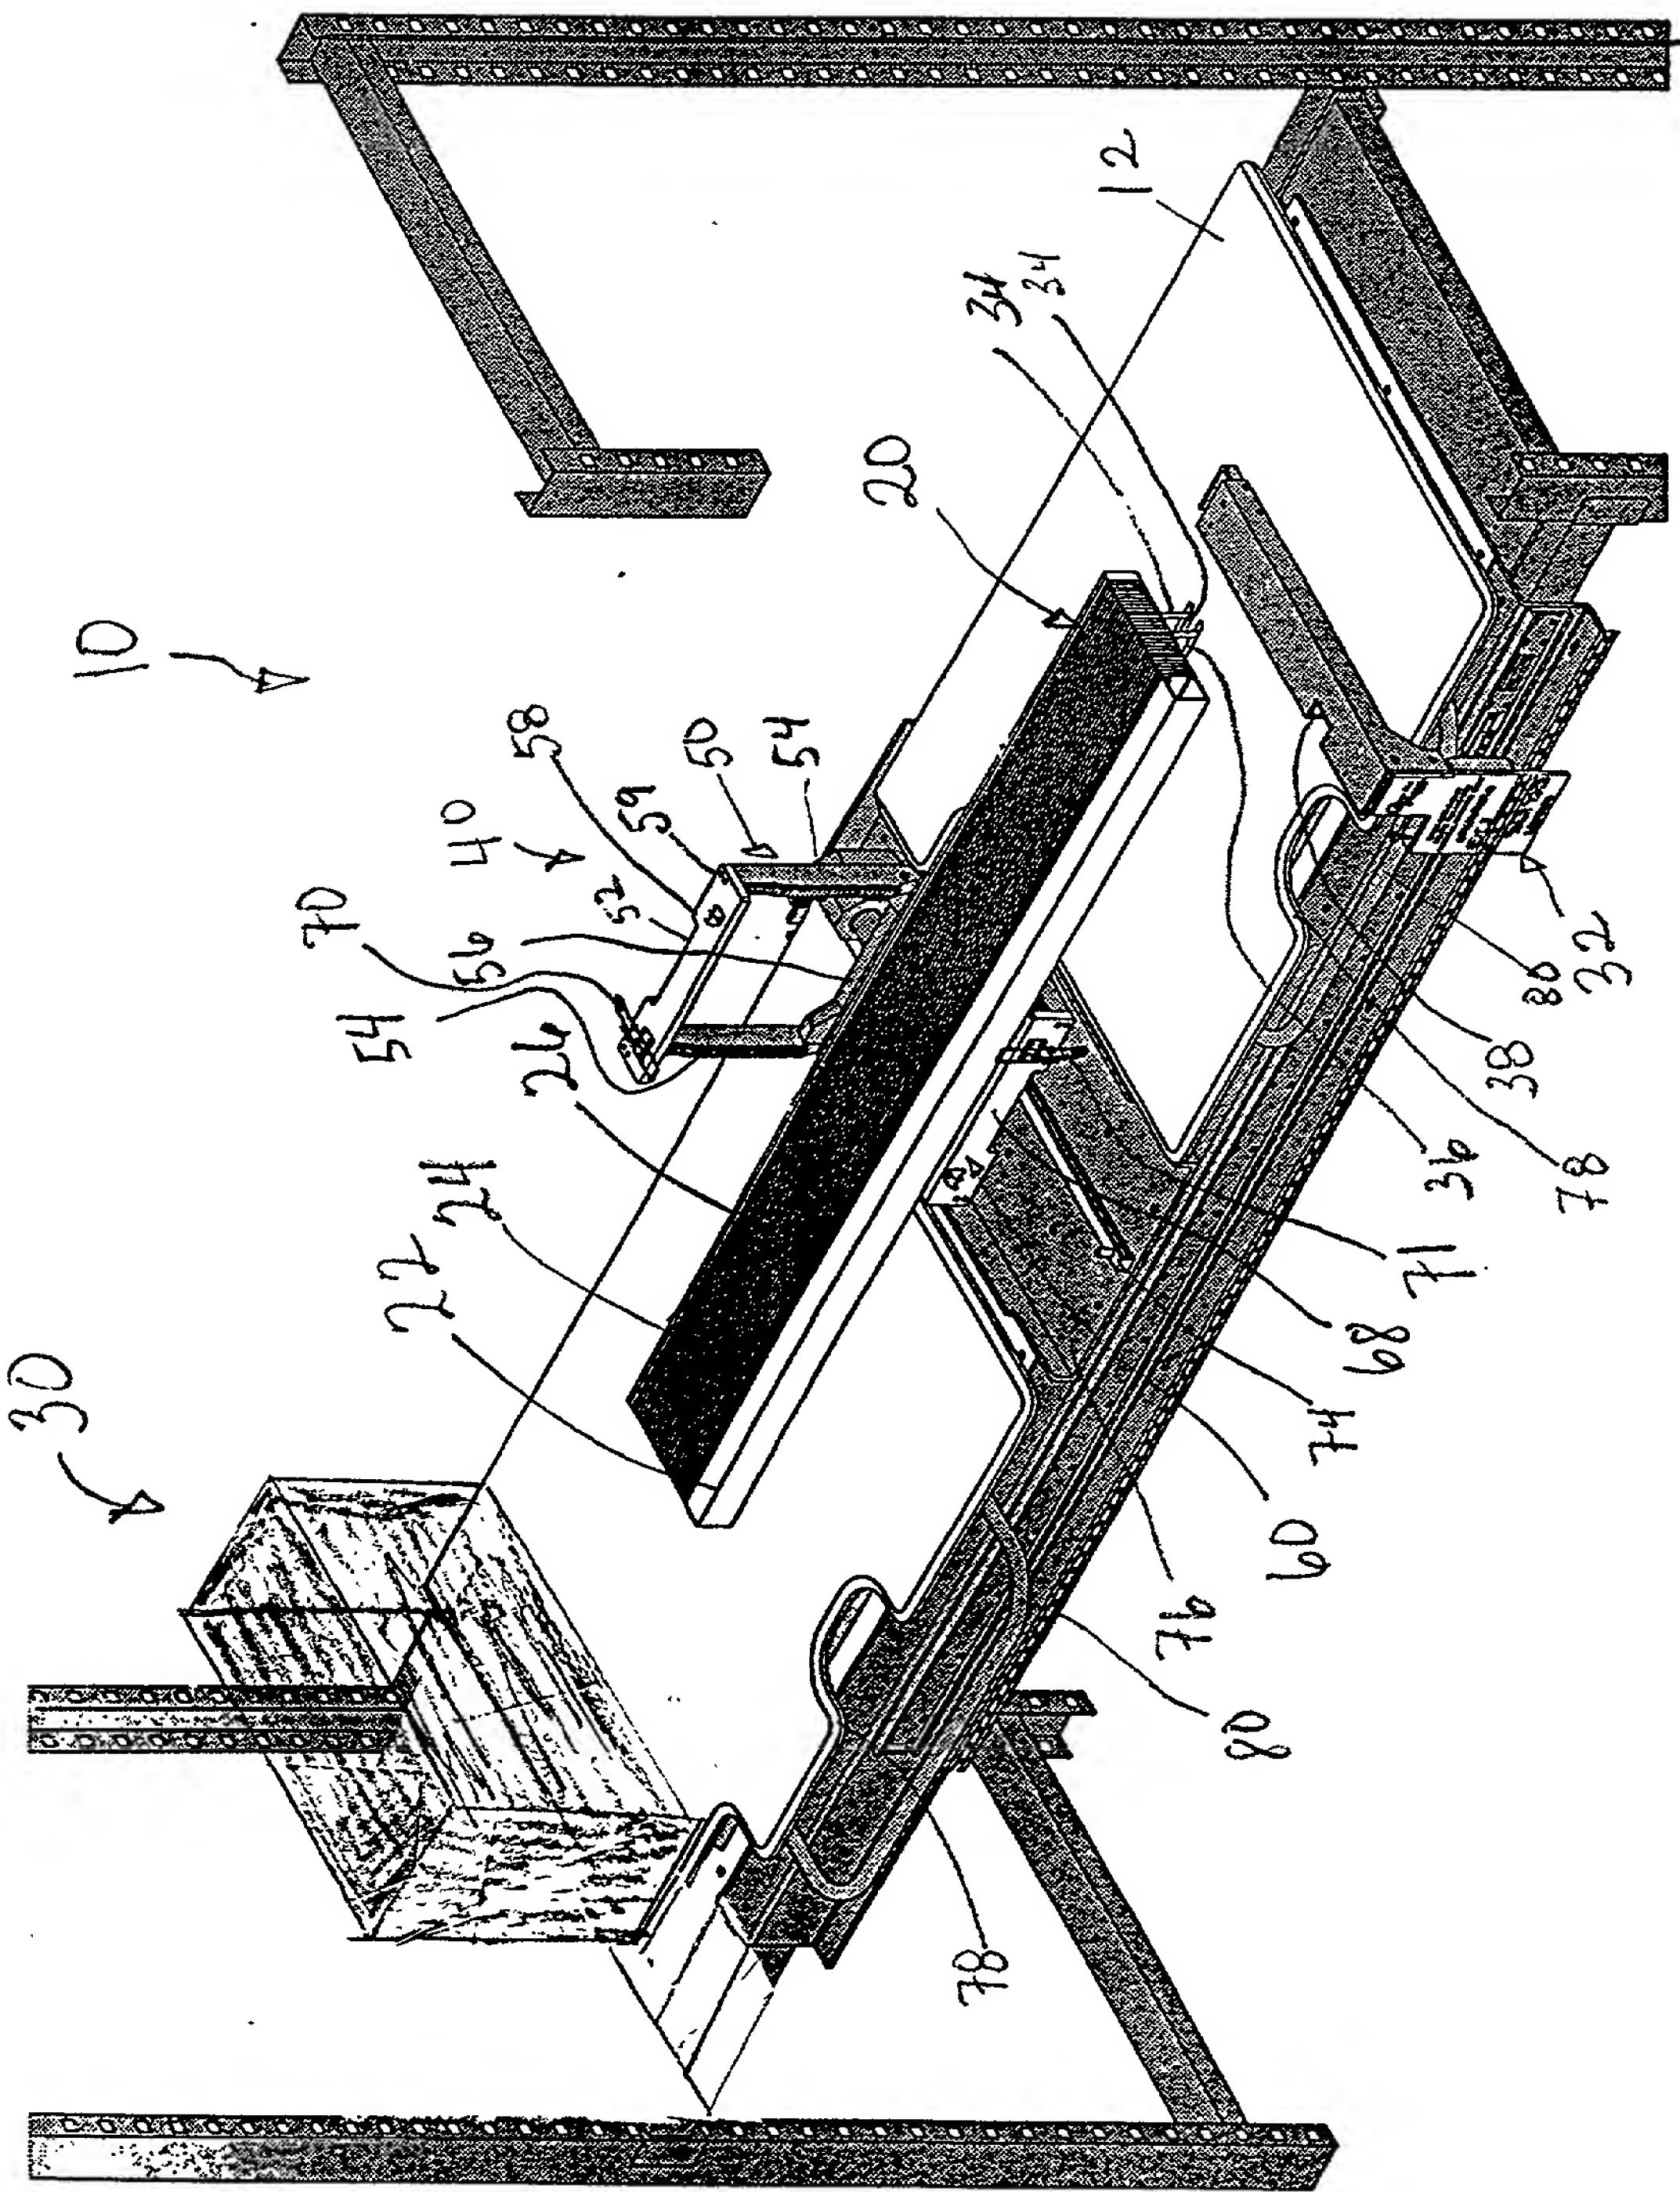


Fig. 1

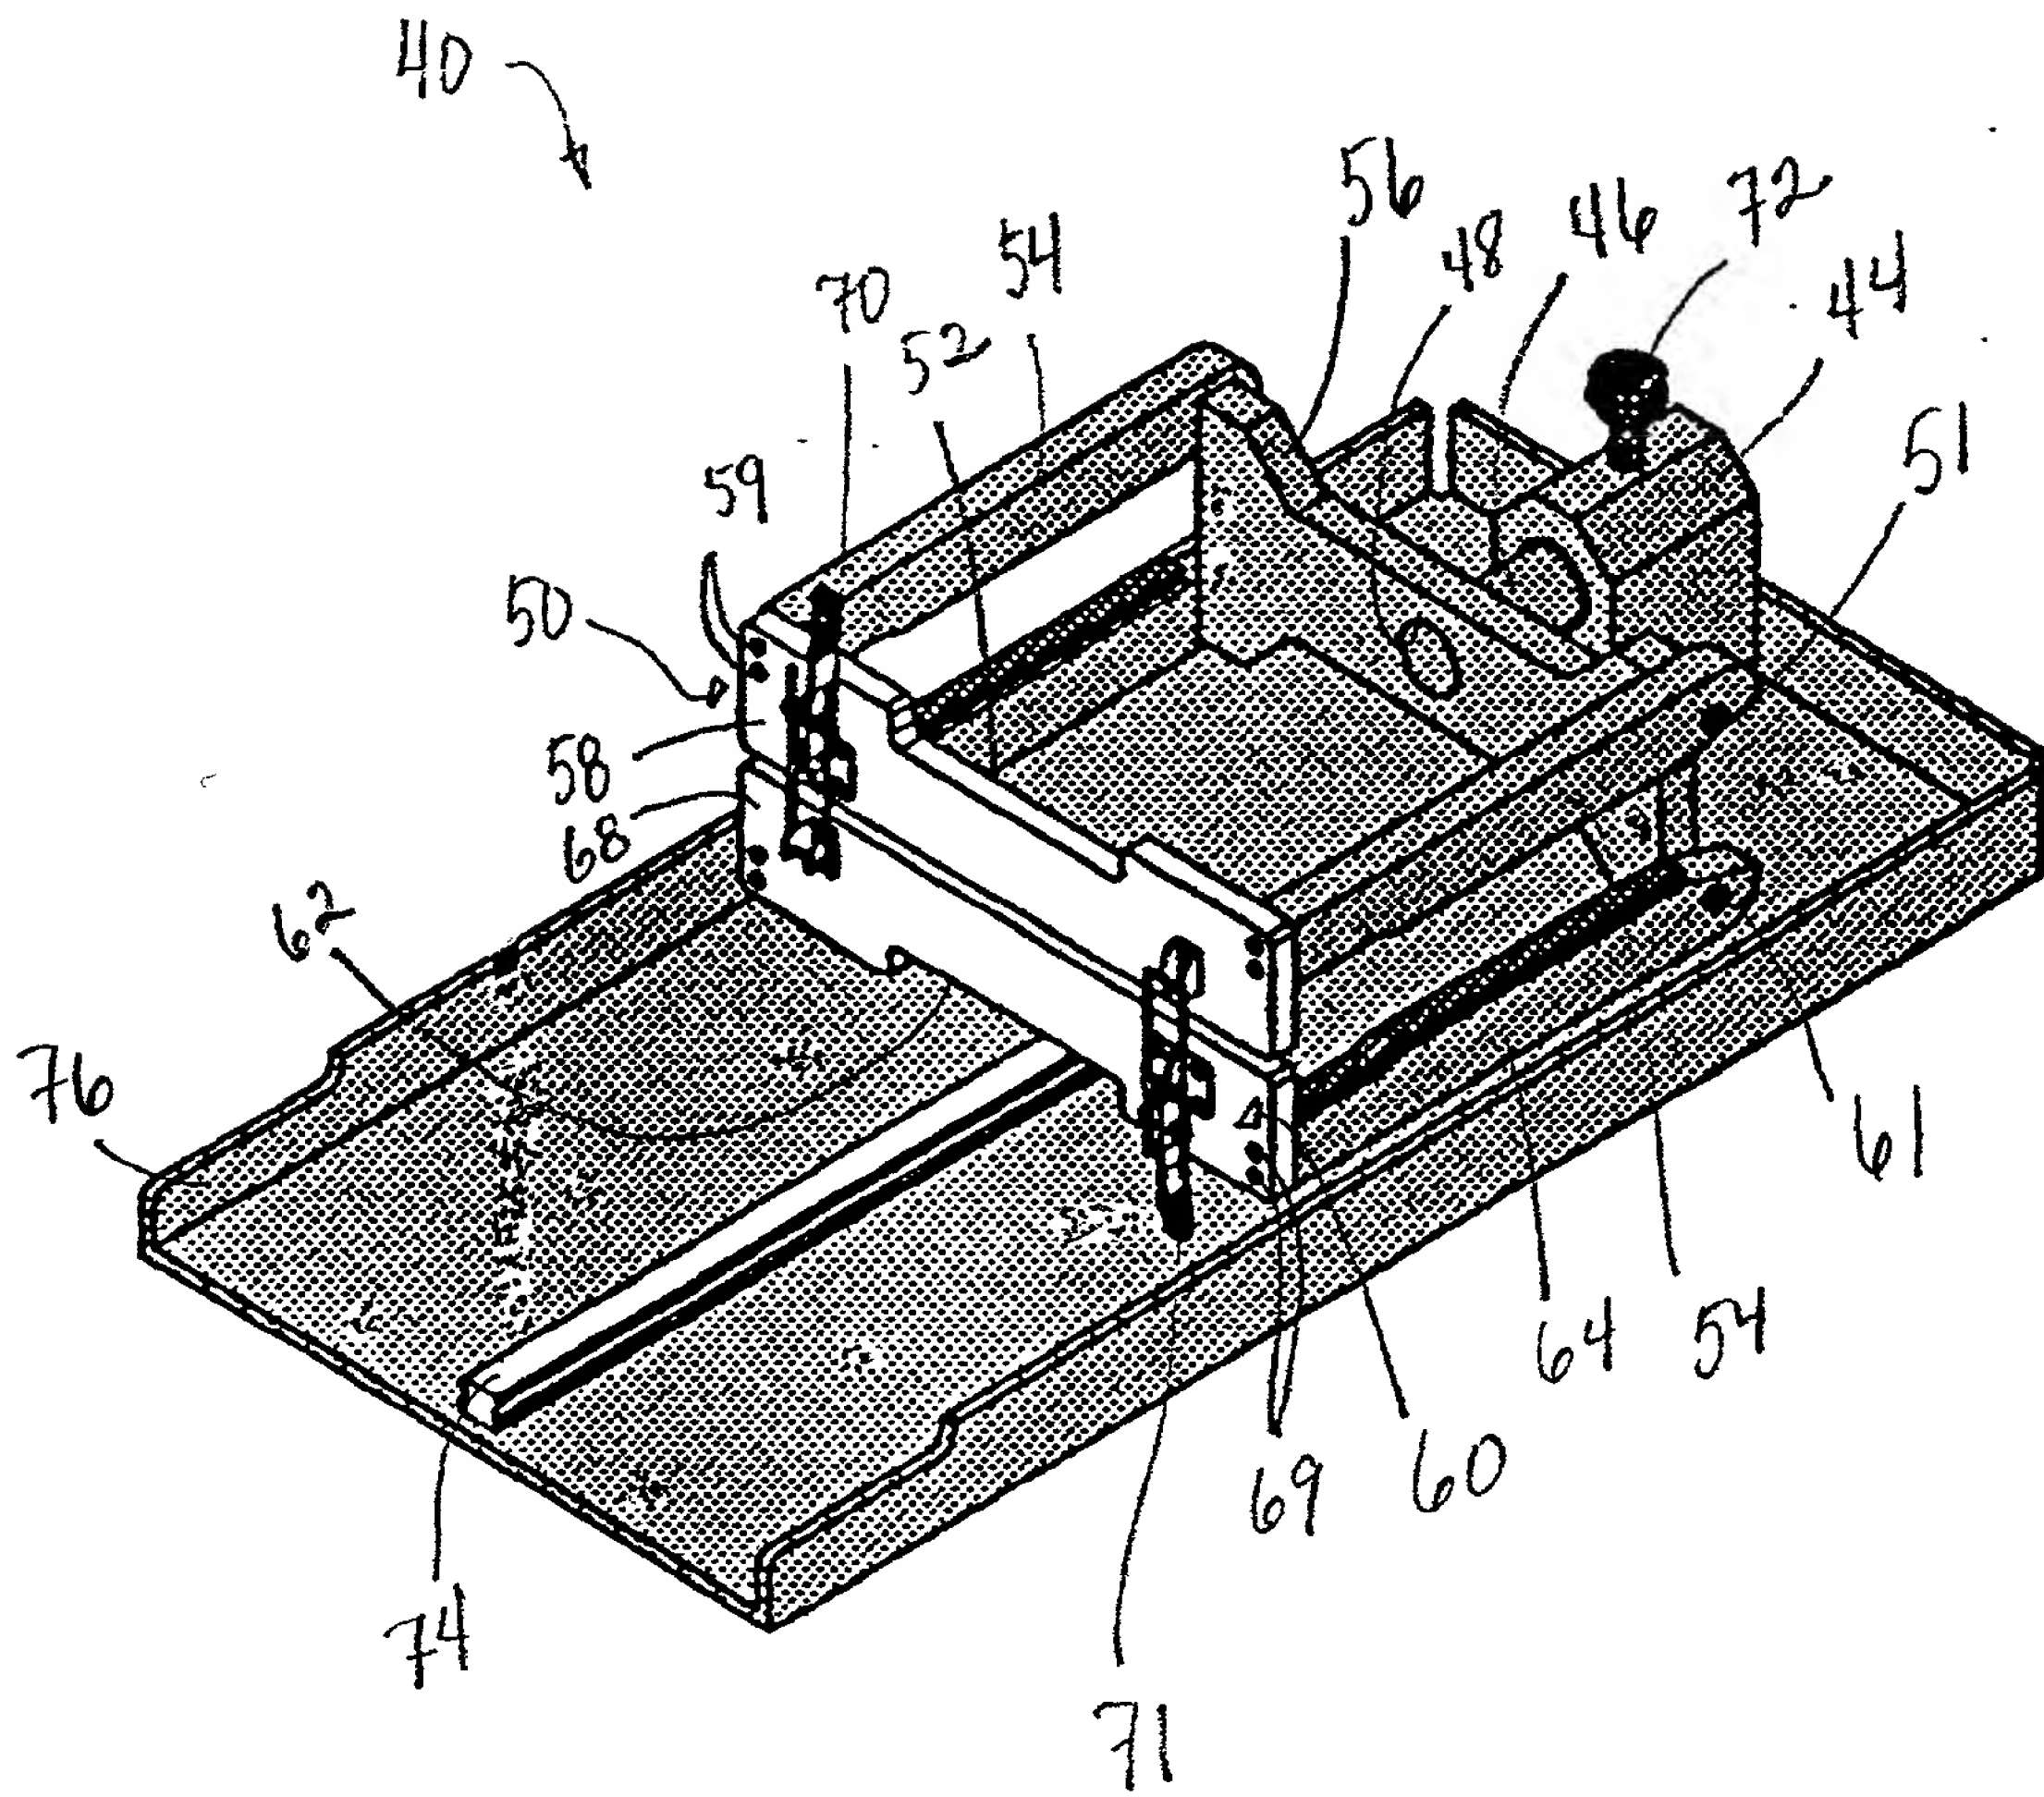


Fig. 2

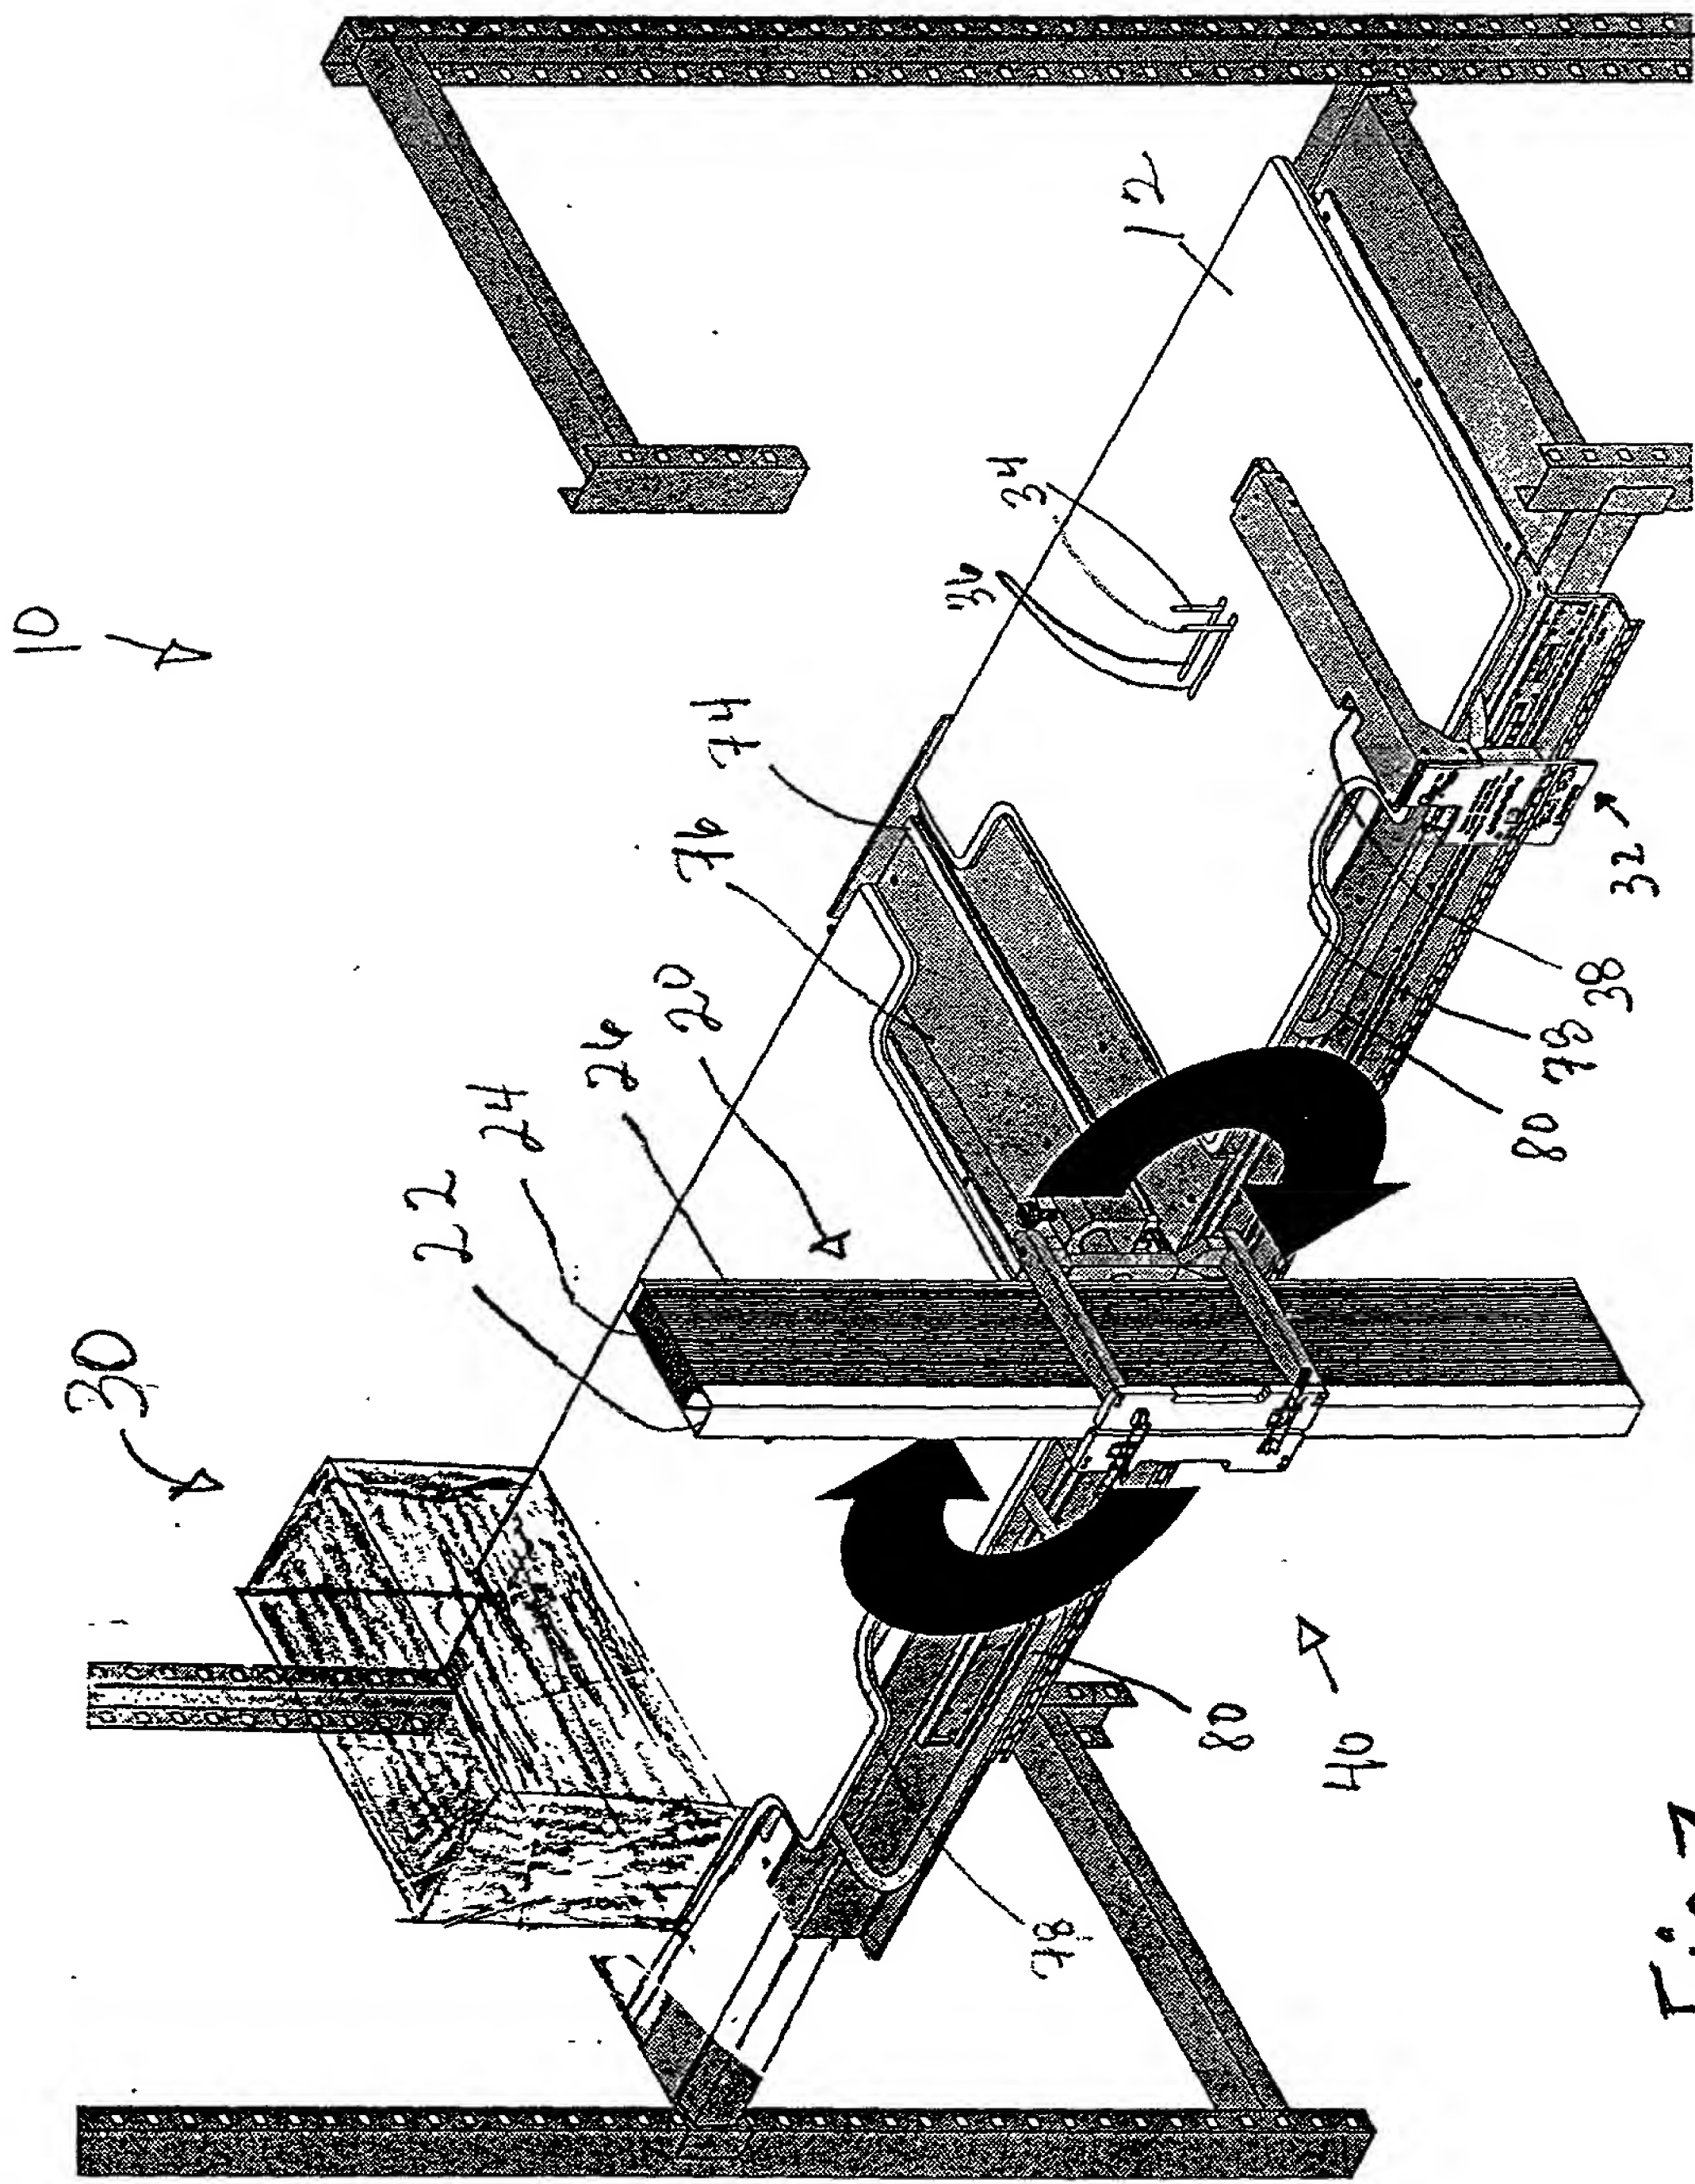


Fig. 3

DECLARATION AND POWER OF ATTORNEY

I the undersigned inventor, hereby declare that:

My residence, post office address and citizenship are as stated below next to my name.

I believe that I am the original, first, and sole inventor of the subject matter which is claimed and for which a patent is sought on the invention entitled **CUTTING TABLE AND CLAMP FOR USE THEREWITH** the specification of which is attached hereto.

I hereby state that I have reviewed and understand the contents of the above-identified specification, including the claims, as amended by any amendments referred to above.

I acknowledge the duty to disclose information material to the examination of this application as defined in Section 1.56 of Title 37 Code of Federal Regulations.

I hereby claim the benefit under Section 120 or Section 119 (e)(1) of Title 35 United States Code of any United States application(s) listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of Section 112 of Title 35 United States Code, I acknowledge the duty to disclose material information as defined in Section 1.56(a) Title 37 Code of Federal Regulations, which occurred between the filing date of the prior application and the national or PCT international filing date of this application:

Application Serial No.	Filing Date	Status
<u>60/160,273</u>	<u>October 19, 1999</u>	<u>Pending</u>

And I hereby appoint:

Charles S. Sara	30,492
Joseph T. Leone	37,170
Craig A. Fieschko	39,668
Mary E. Eberle	43,599
Todd E. Palmer	44,278

Address all telephone calls to: **Charles S. Sara, Esq.**
Telephone: 608-831-2100
Facsimile: 608-831-2106

All correspondence to:

Intellectual Property Department
DEWITT ROSS & STEVENS, S.C.
Firststar Financial Centre
8000 Excelsior Drive Suite 401
Madison, WI 53717-1914

I declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

FULL NAME OF SOLE OR FIRST INVENTOR Alan C. Atwood

INVENTOR'S SIGNATURE Alan C. Atwood DATE 19 OCTOBER 2000

Residence: Madison, Wisconsin USA

Citizenship: USA Post Office Address: 505 W. Doty Street, Madison, WI 53703